



DEGO

Definition of Sound

Nova 3000 SW 300 A

HIGH-PERFORMANCE ALUMINUM MEMBRANE

Instruction manual for 300 Subwoofer

Article-No. 970 0082 00

Designed, engineered & manufactured in Germany

CONGRATULATIONS!

55 years of experience in speaker development transferred into your high-end subwoofer masterpiece DEGO Nova 3000 SW 300 A.


The completely newly designed 300 mm Subwoofer, featuring a rigid aluminum cone that perfectly complements the powerful, double-vented magnet system, delivering a deep, room-filling sound volume. Its outstanding sound quality makes DEGO Nova 3000 SW 300 A one of the finest Subwoofer in German engineering.



Nova 3000 SW 300 A SPECIFICATIONS


DC resistance	R_e	2 x 1.8	Ω
Nominal impedance	Z_N	2 x 2	Ω
Voice coil inductance	L_e	4.9	mH
Voice coil diameter		65	mm
Voice coil height		38.4	mm
Height of gap		8	mm
Linear excursion		± 15.2	mm
Max. mech. excursion		± 25	mm

Frequency response [1W/1m]

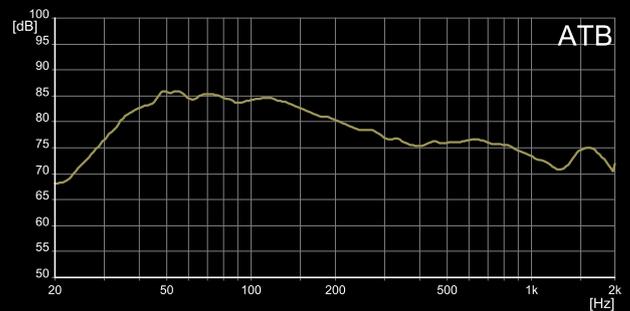


Resonance frequency	f_s	25	Hz
Mechanical Q factor	Q_{ms}	9.1	
Electical Q factor	Q_{es}	0.47	
Total Q factor	Q_{ts}	0.45	

Impedance

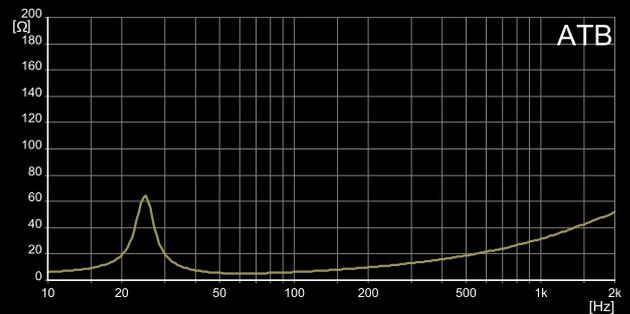

Moving mass	M_{ms}	222.6	g
Effective piston area	S_d	520	cm ²
Mechanical Resistance	R_{ms}	3.80	kg/s
Compliance	C_{ms}	0.19	mm/N
Force factor	Bl	16.2	Tm
Equivalent volume	V_{as}	70.7	dm ³
Efficiency	η	0.22	%
SPL 1W/1m		85.4	dB
SPL 2.83V/1m		88.8	dB

Harmonic Distortion [1W/1m]

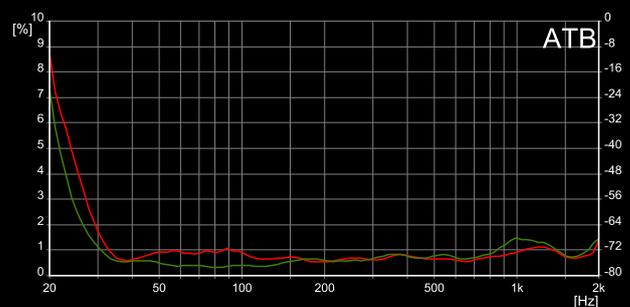

Designed, engineered & manufactured in Germany

Nova 3000 SW 300 A SPECIFICATIONS

Subwoofer	300	mm	Mounting Depth	155	mm
Impedance	2 x 2	Ω	Outside Diameter	326	mm
Nominal Power	2 x 250	W	Mounting Diameter	286	mm
Peak Power	2 x 400	W			
Sensitivity 1W/1m	85.4	dB			

